


OX Type 3.2 x 2.5 mm SMD Crystal Oscillator

FEATURE

- Typical 3.2 x 2.5 x 0.95 mm ceramic SMD package.
- Tight symmetry (45 to 55%) available.
- Operation voltage: 1.8V, 2.5V, 3.3V
- Tri-state enable/disable


TYPICAL APPLICATION

- WLAN/WiMAX
- Mobile Phone
- DSC, Set-top Box, HDTV




RoHS Compliant

DIMENSION (mm)

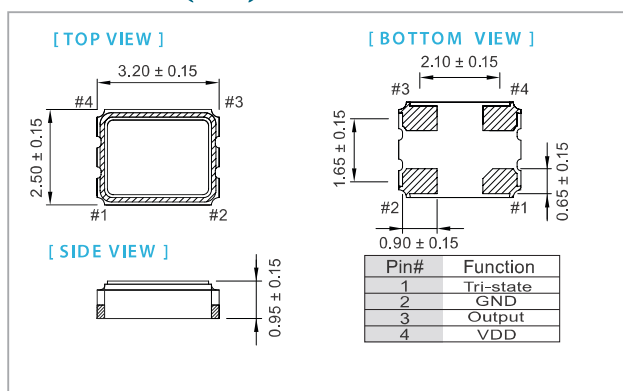

SOLDER PAD LAYOUT (mm)

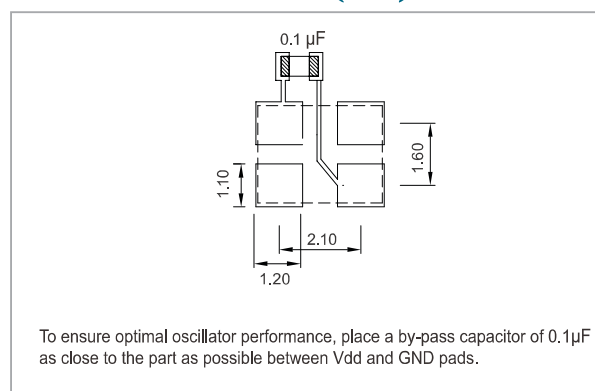

ELECTRICAL SPECIFICATION

Parameter	3.3 V		2.5 V		1.8 V		unit
	Min.	Max.	Min.	Max.	Min.	Max.	
Supply Voltage Variation (VDD) ±10%	2.97	3.63	2.25	2.75	1.62	1.98	V
Frequency Range	1.25	125	1.25	125	1.25	125	MHz
Standard Frequency	24, 26, 32, 38.4, 40						
Supply Current 1.25 MHz ≤ Fo < 100 MHz 100 MHz ≤ Fo ≤ 125 MHz	—	15	—	10	—	7	mA
	—	25	—	20	—	12	
Duty Cycle	45	55	45	55	45	55	%
Output Level (CMOS) Output High (Logic “1”) Output Low (Logic “0”)	2.97	—	2.25	—	1.62	—	V
	—	0.33	—	0.25	—	0.18	
Transition Time:Rise/Fall Time ⁺ 1.25 MHz ≤ Fo < 20 MHz 20 MHz ≤ Fo ≤ 125 MHz							nSec
	—	3	—	4	—	5	
	—	2	—	3	—	4	
Start Time	—	2	—	2	—	2	mSec
Tri-State(Input to Pin 1) Enable (High voltage or floating) Disable (Low voltage or GND)	2.31	—	1.75	—	1.26	—	V
	—	0.99	—	0.75	—	0.54	
Period Jitter(Pk-Pk)	—	40	—	40	—	40	pSec
RMS Phase Jitter (Integrated 12 kHz ~ 20 MHz)	—	1	—	1	—	1	pSec
Standby Current	—	10	—	10	—	10	μA
Aging (@ 25°C 1st year)	—	±3	—	±3	—	±3	ppm
Storage Temp. Range	-55	125	-55	125	-55	125	°C

Standard frequencies are frequencies which the crystal has been designed and does not imply a stock position.

⁺ Transition times are measured between 10% and 90% of VDD, with an output load of 15pF.

FREQ. STABILITY vs. TEMP. RANGE

Temp. (°C)	ppm	±20	±25	±50
-10 ~ +60	○	○	○	○
-20 ~ +70	△	○	○	○
-40 ~ +85	×	○	○	○

* ○: Available △: Conditional X: Not available

* Inclusive of calibration @ 25 °C, operating temperature range, input voltage variation, load variation, aging (1st year), shock, and vibration

Note: not all combination of options are available. Other specifications may be available upon request.
 Rev(7)04/2015